


COLORFUL LED TUBE/BALL LIFT SYSTEM



User Manual

=====PROFESSIONAL LIGHTING EQUIPMENT=====

1.MENU KEY:

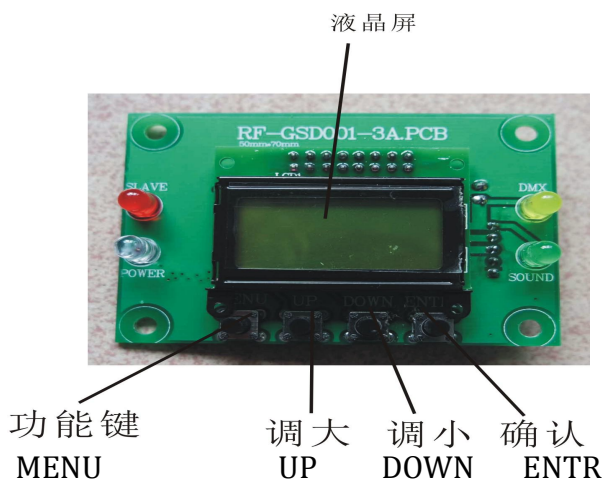

Operation: Press the MENU key will cycle out different functions, press the key to adjust the up or down to modify its parameter values. Press the Enter button to confirm

2.Specification for Menu Key.

NO	Display show	Specification
1	DMX-MODE CH6/CH10	Press the Up / Down key to switch 6/10 channel, press the OK Enter key to save
2	DMX-ADR 001	Press the up and down keys to adjust the DMX512 address, press the Enter key to save.
3	ADJ-R 255	Press the up and down keys to adjust the red brightness(0-255), press the Enter key to save.
4	ADJ-G 255	Press the up and down keys to adjust the green brightness (0-255), press the Enter key to save.
5	ADJ-B 255	Press the up and down keys to adjust the blue brightness (0-255), press the Enter key to save.
6	PROGRAM 001	Press the up or down key to select the built-in program and press the Enter key to save.
7	SPEED	Press the up or down key to

	16	select the built-in program speed (1-16), press the Enter key to save.
8	TEST MODE	Press the up and down keys to enter sound and auto mode
9	RESET	Press enter Key to confirm the reset

3. DMX512 Channal

6CH

NO	Function	Specification
1CH	Red dimmer	Red dimming (0-255) linear dimming /from dark to light
2CH	Green dimmer	Green dimming (0-255) linear dimming /from dark to light
3CH	Blue dimmer	Blue dimming (0-255) linear dimming /from dark to light
4CH	Dimmer	RGB dimming (0-255) linear dimming /from dark to light
5CH	Strobe	(0-255) strober from slow to fast
6CH	Light height	(0-255) adjust the height of the lift tube

10CH

NO	Function	Specification
1CH	Red dimmer	Red dimming (0-255) linear dimming /from dark to light
2CH	Green dimmer	Green dimming (0-255) linear dimming /from dark to light
3CH	Blue dimmer	Blue dimming (0-255) linear dimming /from dark to light
4CH	Dimmer	RGB dimming (0-255) linear dimming /from dark to light
5CH	Strobe	(0-255) strober from slow to fast
6CH	Light height	(0-255) adjust the height of the lift tube
7CH	Adjust lift speed	(0-255) Motor from fast to slow
8CH	Built-in program	The first 7 channels are enabled (0-60); when DMX is More than 60, each built-in program is incremented by 17.
9CH	Built-in program speed	0-255 Upward speed slows down, 0 is most quickly
10CH	Sound-controlled/Auto and reset	(0-64) No function; (65-128) Auto; (129-192) Sound control; (193-255) Reset. Each function is delayed by 5 seconds.

Turn on the power, when receiving the DMX512 signal, the LCD screen signal from the "X" to "V", at this moment, can accept DMX control.

In the address code state, after the multi-machine connect together, if does not have the control with DMX, will enter the master slave model, operates one

equipment, the rest in the address status equipment follows the host synchronization movement procedure. Connected to the console, in the address state of the device can be controlled by DMX control.

Specification

1. Voltage: AC 90-240v, 50/60Hz
2. Power consumption: 140w
3. Lighting Source: 252pcs led
4. Color: RGB
5. Control: DMX, master slave, sound active, auto mode.

7. Display: LCD display
8. N.W.: 9 kg
9. G.W.: 11 kg
10. Carton size: 430×310×400mm

4. Technical Index

Sound-active, build-in PRO, Master/Slave control。
strobe, program for choosing color, color changing。
256 high gray grade, 0-100%dimmer

